





-0,4 ( « ») (cos φ)  
 0,4 50 .  
 от 30 ( 600 p  
 44  
 5 5

: IP21.

: -10° +40° .  
 : 50% 40° .  
 : 1000 .

51321.1-2007

12.2.007.5-75


. 4.1, 4.2, 5.6

Wz2 «N#! /, 8-! - -/% <» À(-- A, À- 1 # ! Ä/ , -/& ,

¶ & 1#. x (, / -{ ( 63

Ä# 4 ( &I4!W 843) 525-55-32, 525-56-50, [www.elstart.ru](http://www.elstart.ru)

e-mail [Wifo@elstart.ru](mailto:Wifo@elstart.ru) [elsys07@mail.ru](mailto:elsys07@mail.ru)

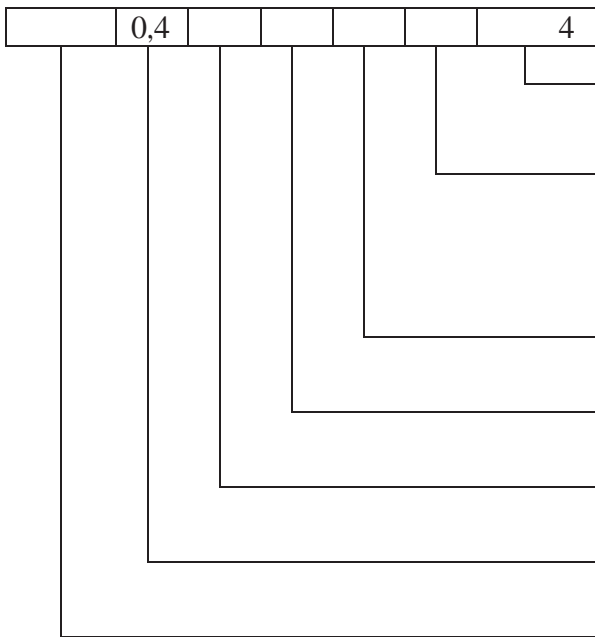

15150-69

1 -  
2 -

:  
DCR K;

25  
91224521-2009».

0,4 , 75 ,  
DCRK: « -0.4-75-25-31 4, -3433-002-

|           |  |
|-----------|--|
|           |  |
|           |  |
|           |  |
|           |  |
|           | 0,4  |
|           | 50   |
|           | 30, 50, 75, 100, 112.5,<br>150, 200, 300, 400, 600 |
|           | 4-9  |
|           | 10-50  |
| cos       | 0,8-1  |
|           | 220, 50  |
| 14254 -80 | IP21   |
|           | 4  |



